



Basic Product Specification

Pleated blind "Type PL 11"

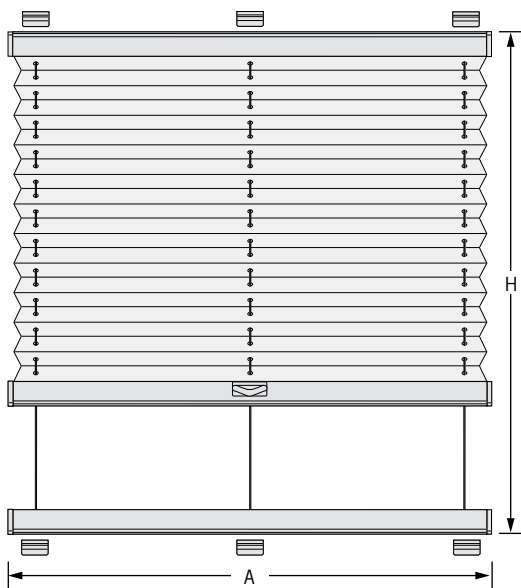

Fitting Situations:
Angled / Horizontal

Note

- Possible with operating rod (extra charge).
- Assembly angled or horizontal.
- Tension wires are UV-resistant and made of black coated steel wire.

Limit dimensions of pleated blinds


| Width (A) | | Height (H) | |
|-----------|---------|------------|---------|
| min | max | min | max |
| 200 mm | 1500 mm | 300 mm | 4000 mm |

Limit dimensions of honeycomb pleated blinds

| Width (A) | | Height (H) | |
|-----------|---------|------------|---------|
| min | max | min | max |
| 200 mm | 1500 mm | 300 mm | 4000 mm |

Package Height

| Blind Height | Package Height |
|--------------|----------------|
| 500 mm | ca. 60 mm |
| 1000 mm | ca. 70 mm |
| 1500 mm | ca. 80 mm |
| 2000 mm | ca. 90 mm |
| 2500 mm | ca. 100 mm |
| 3000 mm | ca. 110 mm |
| 3500 mm | ca. 120 mm |
| 4000 mm | ca. 130 mm |



Profiles Color

| | |
|---------------------------------|--------------------------------------|
| <input type="checkbox"/> white | <input type="checkbox"/> black-brown |
| <input type="checkbox"/> silver | <input type="checkbox"/> anthracite |

